

JL-0408

OUTPUT:0.1W~0.5W(APPROX)

Coreless driving motors(Stamping type) | 冲压型空芯杯驱动电机

Typical Applications

Medical equipment: smart medicine box
Cosmetic & beauty industry product: electric cosmetic pen, facial cleansing brush, facial massager
Electric toy: aeromodelling, mini drone, quadcopter
Vibrator: electric shaver, mobile phone, tablet
Servo, sex product, precision instruments


主要用途

医疗器械: 智能药盒
电动美容产品: 美容笔、电动脸部清洁仪、脸部按摩器
电动玩具: 飞机模型、四轴飞行器
振动器: 剃须刀振动、手机振动、平板电脑振动, 舵机、性用品、精密仪表

WEIGHT:0.47g(APPROX)

基本信息 BASIC INFORMATION		电压 VOLTAGE		空载点 NO LOAD		最大效率点 AT MAXIMUM EFFICIENCY					堵转点 STALL		端电阻 Terminal resistance		
型号 Model	计算KV Calculate KV	工作电压范围 Operation range	额定电压 Nominal	电流 Current	转速 Speed	电流 Current	转速 Speed	效率 Efficiency	转矩 Torque		功率 Power	电流 Current		转矩 Torque	
	rpm /V	VDC	VDC	mA	r/min	mA	r/min	η_{max}	mN.m	gf.cm	mW	A	mN.m	gf.cm	Ω
JL-0408	6.4	2.0~4.5	4.2	42	27000	71.0	16964	16.68%	0.028	0.286	49.7	0.12	0.075	0.77	35.00
	18.7	1.5~3.5	3.0	60	56000	98.0	34731	15.20%	0.012	0.122	43.6	0.16	0.032	0.33	18.75

DIRECTION OF ROTATION

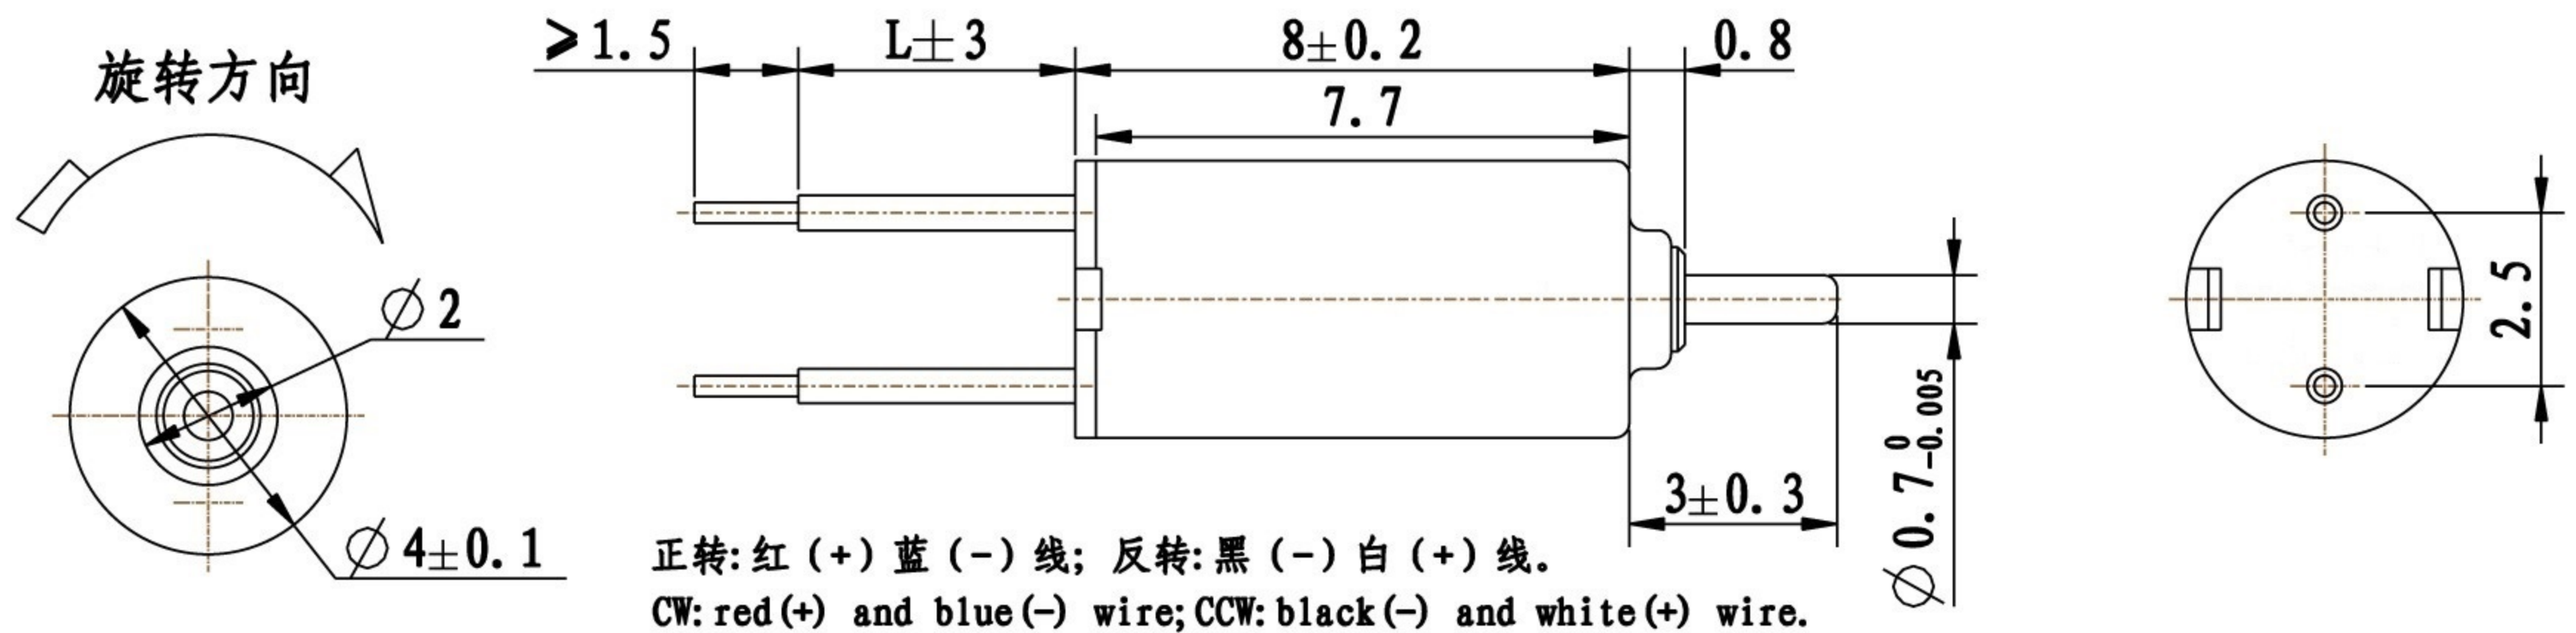

UNIT : MILLIMETERS

JL -0408-1

4.2V

JL -0408-2

3.0V

